
Continental

Refrigerator

72" SANDWICH UNIT REFRIGERATORS

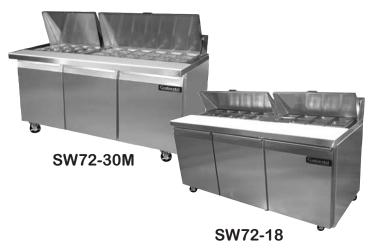

Standard Features

- Unique Air Flow Distribution Allows Pan Product to Maintain 33°–41°F Being in Compliance with and Certified Under the '98 NSF Standard For Preparation Units.
- · Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Easily Serviceable Back Mounted Compressor
- 2" Non-CFC Polyurethane Foam Insulation
- · Spring Loaded, Self Closing Door
- · Magnetic Snap-In Gasket
- 5" Casters, two with brakes, two without brakes
- · Heavy-Duty, Epoxy-Coated Steel Shelves
- · Interior Hanging Thermometer
- · Full Length Nylon Cutting Board
- Cabinet Construction Consisting of Stainless Steel Front and Top, Aluminum End Panels, Case Back and Interior
- · Non-Corrosive, Plasticized Fin Evaporator Coil
- Completely Enclosed, Vented and Removable Case Back
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- 1/6 Size Pans, 4" Deep
- · 10 ft Cord and Plug Attached

Models Available

- SW72-12 SW72-12C SW72-18M
- SW72-18 SW72-18C SW72-27M
 - SW72-30M

Utilizing Environmentally Safe, CFC-free R-134a Refrigerant



Optional Features & Accessories

- Legs
- · Remote Models R
- Stainless Steel End Panels-SA Models
- Stainless Steel Interior & Exterior-SS Models
- Stainless Steel Finished Back in Lieu of Aluminum
- Stainless Steel Roll Out Drawers in Lieu of Doors-D Models

- · Electric Condensate
- Pan Opening Sizes
- Stainless Steel Legs
- Additional Shelves
- Door Locks
- · Single Overshelf
- · Double Overself

72" SANDWICH UNIT REFRIGERATORS

SPECIFICATIONS	SW72-12	SW72-18	SW72-12C	SW72-18C	SW72-18M	SW72-27M	SW72-30M
DIMENSIONAL DATA							
Net Capacity (cu. ft.)	20.6	20.6	20.6	20.6	20.6	20.6	20.6
1/ ₆ Size Pans	12	18	12	18	18	27	30
Width, Overall (in.)	72	72	72	72	72	72	72
Depth, (incl. Hdls.& Bumpers) (in.)	31	31	31	31	31	31	31
Depth, Body Only (Less Door(s)(in.		271/2	271/2	271/2	271/2	271/2	271/2
Depth, Cutting Board (Std. Top)	12	12	19	19	10	10	10
Height, Overall (incl. 5" Casters) (in.)		42 3/8	42 3/8	42 3/8	42 3/8	42 3/8	42 3/8
Shelf Area (sq. ft.)	10.2	10.2	10.2	10.2	10.2	10.2	10.2
No. of Shelves	3	3	3	3	3	3	3
No. of Doors	3	3	3	3	3	3	3
Condensing Unit Size (H.P.)	1/4	1/4	1/4	1/4	1/4	1/4	1/4
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a	R134a
Cabinet Electrical	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Amps	9.0	9.0	9.0	9.0	9.0	9.0	9.0
Fans	4	4	4	4	4	4	4
Interior Depth (in.)	20	20	20	20	20	20	20
Interior Height (in.)	26 ¹ / ₄	261/4	261/4	26 ¹ / ₄	261/4	26 ¹ / ₄	26 ¹ / ₄
Interior Width (in.)	68	68	68	68	68	68	68
Shipping Weight (lbs.)	385	389	398	398	398	414	420
Shipping Height (in.)	431/4	431/4	431/4	431/4	431/4	431/4	431/4
Shipping Length (in.)	801/4	801/4	801/4	801/4	801/4	801/4	801/4
Shipping Depth (in.)	46	46	46	46	46	46	46
72 19 5/8 — BOOR DOOR OPENING FRONT VIEW	10 1/4	23 3/4 D008 35 7/8 OPENING	23 3/4 BOOR OPENING	35 7 7 19 3/8	42 % 37	5516	
FRONT VIEW	Standard Top Side	1	C -Top	Side View	¥	M -Top Side Viev	v
72"	72"	-	-	72	-	72 —	-
30"			34		34 0 19		
SW72-12	SW72-18		∮ 31/4 SW	72-12C	1	SW72-18C	<u> </u>
					3 1/4	01172 100	,
72 ——24—————————————————————————————————	34	72 —	• 10	34	72 — 72 — SW72-30N	• 10	
SW72-10W1 SW72-27M							

